

24V | LED FLEX NEON - Wave - Top bend

INSTALLATION INSTRUCTIONS

SAFETY INFORMATION:

WARNING

Use this neon light with 24V DC power supply only.
Any other power feed may damage the neon light.

WARNING

To reduce the risk of fire, electric shock or injury to person,
make sure that the electrical power to the neon light is
disconnected at the source prior to installation or any servicing.



DRIVER SELECTION:

Recommend Loading Chart

Power Supply CV DC24V

| Rated power | 35W | 60W | 75W | 85W | 100W | 120W | 150W | 200W | 240W | 320W |
|-------------|-----|------|------|-----|------|------|------|------|------|------|
| 14W/m | 2M | 3.5M | 4.5M | 5M | 6M | 7M | 9M | 12M | 14M | 19M |



Lead type



Notes: the recommended driver is calculated as reserved 20% space wattage.

MOUNTING OPTIONS:



Aluminum Clips with Screws

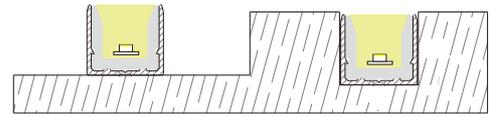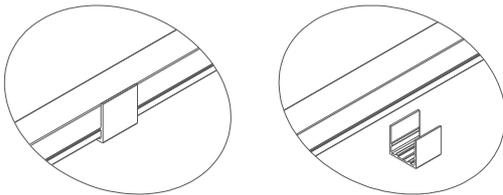

SURFACE MOUNTING

EMBEDDED MOUNTING



Fixed Aluminum Profile with Screws

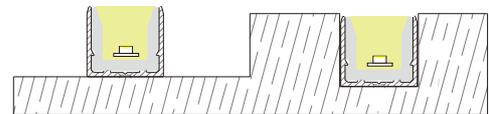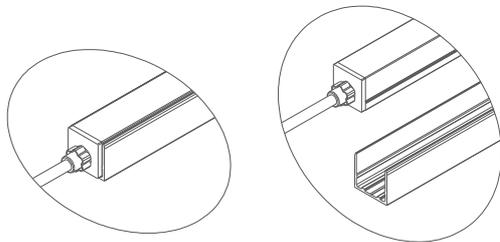

SURFACE MOUNTING

EMBEDDED MOUNTING

Bendable Stainless Steel Profile with Screws

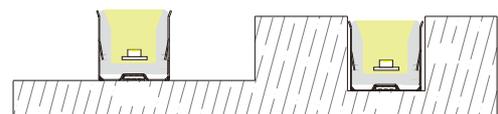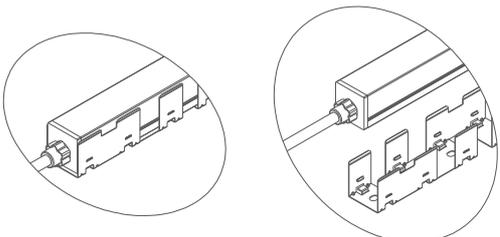

SURFACE MOUNTING


EMBEDDED MOUNTING

24V | LED FLEX NEON - Wave - Top bend


INSTALLATION INSTRUCTIONS

BENDING DIRECTION & REMINDER:


MINIMUM BEND RADIUS IS SHOWN BELOW

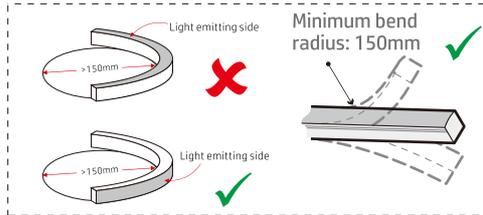

DO NOT TWIST, SUSPEND UNSUPPORTED, DO NOT BEND SHARP ANGLE

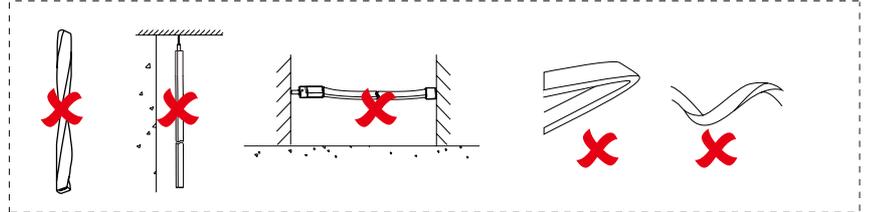

REMINDER

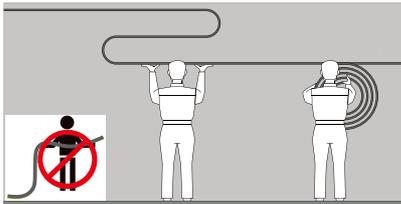


Two people are required for any fixture removal longer than 3 meters.

Repeated installation and removal can weaken the PCB of the neon light.

CONNECTION DIAGRAM:

Single-end Feeding Wiring

MONO

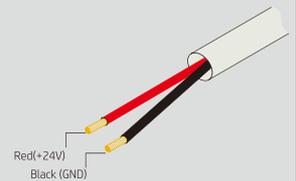

Connection by ends of each length

