


24V | GRAZER - VL-FLWW-3D-G2

INSTALLATION INSTRUCTIONS



SAFETY INFORMATION:

WARNING

Use this wall washer with 24V DC power supply only. Any other power feed may damage the wall washer.

WARNING

To reduce the risk of fire, electric shock or injury to person, make sure that the electrical power to the wall washer is disconnected at the source prior to installation or any servicing.

DRIVER SELECTION:


Recommend Loading Chart

Power Supply CV DC24V

Rated power	48W	84W	108W	120W	144W	168W	216W	288W	336W	456W
24W/m	2M	3.5M	4.5M	5M	6M	7M	9M	12M	14M	19M


Lead type

Single-end Feed



DC input

Double-end Feed




DC input

DC input


Notes: the recommended driver is calculated as reserved 20% space wattage.

MOUNTING OPTIONS:

Fixed aluminum profile

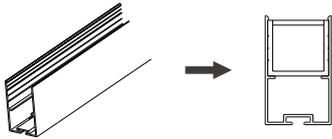


Bendable profile

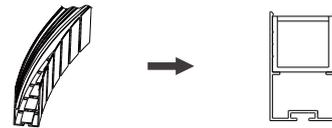

Aluminum mounting clips




Bracket



Fixed aluminum profile with visor




Bendable profile with visor

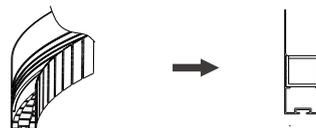


INSTALLATION INSTRUCTIONS

BENDING DIRECTION & REMINDER:


MINIMUM BEND RADIUS IS SHOWN BELOW

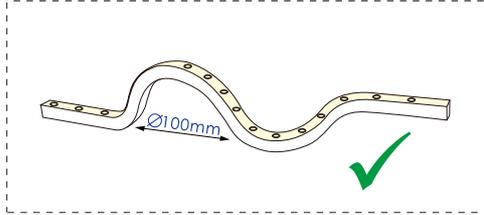

DO NOT TWIST, SUSPEND UNSUPPORTED, DO NOT BEND SHARP ANGLE

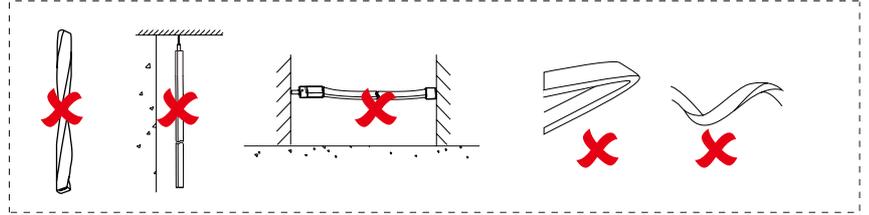

REMINDER

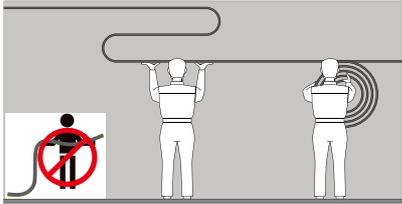

Two people are required for any fixture removal longer than 3 meters.

Repeated installation and removal can weaken the PCB of the wall washer.

CONNECTION DIAGRAM:

