


24V | GRAZER - VL-FLWW-3D-S20

INSTALLATION INSTRUCTIONS



SAFETY INFORMATION:

WARNING

Use this wall washer with 24V DC power supply only. Any other power feed may damage the wall washer.

WARNING

To reduce the risk of fire, electric shock or injury to person, make sure that the electrical power to the wall washer is disconnected at the source prior to installation or any servicing.

DRIVER SELECTION:


Recommend Loading Chart

Power Supply CV DC24V

Rated power	35W	60W	75W	85W	100W	120W	150W	200W	240W	320W
14W/m	2M	3.5M	4.5M	5M	6M	7M	9M	12M	14M	19M

Lead type

Single-end Feed



DC input

Double-end Feed





DC input

DC input

Notes: the recommended driver is calculated as reserved 20% space wattage.

MOUNTING OPTIONS:


FRONT CLIPS

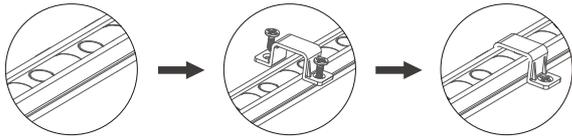


MOUNTING CLIPS





ALUMINUM PROFILE

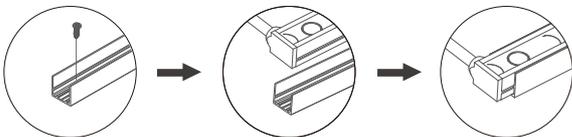

BENDABLE PROFILE

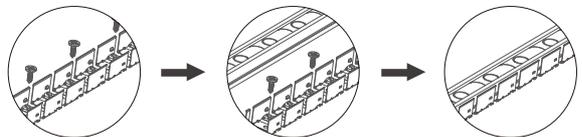


ADJUSTABLE BRACKET




INSTALLATION INSTRUCTIONS

BENDING DIRECTION & REMINDER:


MINIMUM BEND RADIUS IS SHOWN BELOW

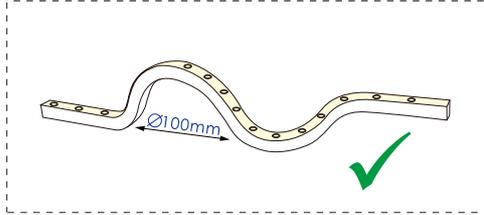

DO NOT TWIST, SUSPEND UNSUPPORTED, DO NOT BEND SHARP ANGLE

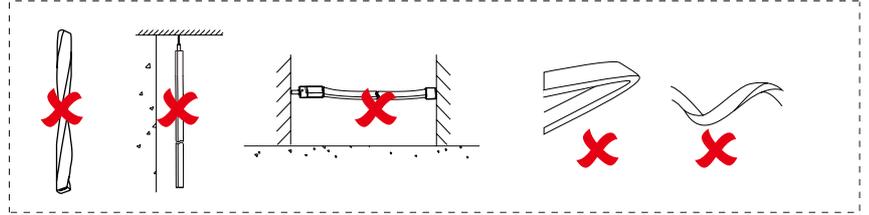

REMINDER

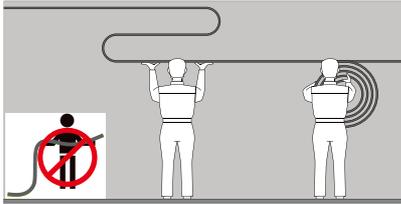


Two people are required for any fixture removal longer than 3 meters.

Repeated installation and removal can weaken the PCB of the wall washer.

CONNECTION DIAGRAM:

Single-end Feeding Wiring

MONO

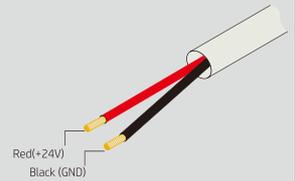

Input by one end

