

Side-View-RGB series

COB | 9W/m | 10mm

COB

p/n: VFL-SVCOB-RGB-630-10-24V09



Features

- Side view RGB version
- 24V input
- **Hotspot-free appearance**
- RGB controlled by PWM controller
- Durable, flexible and low profile
- Double sided 3M tape mounting

Electrical Data

Voltage	24V DC
Wattage per meter	9W
Current per meter	0.38A/24V

LED Data

LED type	COB
Manufacturer	SAN'AN
Chips per meter	630

Photometric Data

Color temperature	RGB
Color rendering index Ra 	-
Luminous flux per meter	R: 44 lm G: 127 lm B: 16 lm RGB: 182 lm
Luminous efficacy	20 lm/W RGB
Beam angle	135°
Dimmable	0~100%

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +45 C°
Storage temperature	-20 ~ +70 C°

Dimensions

Cutting increments	100 mm
Length	5,000 mm
Width	10 mm
Height	2.0 mm

Lifetime

Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 C°



Figure 1.

Dimensions & Cutting increments

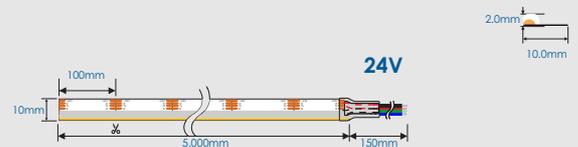


Figure 2.

Suitable Accessories

Profile



Surface-Mount
Code: VL-SF1507



Recessed-Mount
Code: VL-RC2207



Corner-Mount
Code: VL-TR1616

Figure 3.

IP Protection Ratings



- LED
- FPCB
- Silicone Gel
- Double-sided tape 3M 300LSE (indoor)
- Double-sided tape 3M VHB (outdoor)