

Small Cut series

COB | 9.6W/m | 8mm

COB

p/n: VFL-SMCOB-940K-528-8-24V09



Features

- Small cut 7.5mm unit length
- 12V and 24V input
- **Hotspot-free appearance**
- High efficacy of 90Lm/W
- CRI>90
- Durable, flexible and low profile
- Double sided 3M tape mounting

Electrical Data

Voltage	12V/24V DC
Wattage per meter	9.6W
Current per meter	0.8A/12V, 0.4A/24V

LED Data

LED type	COB
Manufacturer	SAN'AN
Chips per meter	528

Photometric Data

Color temperature	2700K / 3000K 4000K / 6500K
Color rendering index Ra	>90
Luminous flux per meter	864 lm >4,000K 821 lm <3,000K
Luminous efficacy	90 lm/W >4,000K
Beam angle	135°
Dimmable	0~100%

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +45 C°
Storage temperature	-20 ~ +70 C°

Dimensions

Cutting increments	7.5 mm/12V, 11.3mm/24V See figure 1.
Length	5,000 mm
Width	8 mm
Height	1.6 mm

Lifetime

Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 C°



Figure 1.

Dimensions & Cutting increments

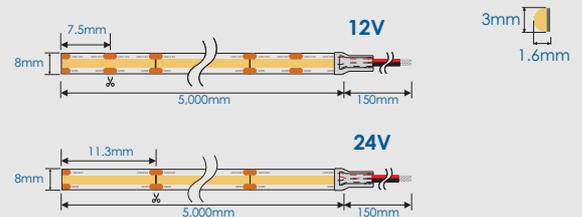


Figure 2.

Suitable Accessories

Connector



Profile



Figure 3.

IP Protection Ratings

