

# Tunable-2-wire series

COB | 7.2W/m | 8mm

# COB

p/n: VFL-TWCOB2-940K-640-8-12V08



## Features

- Tunable white 2-wire wiring system
- 12V input
- Hotspot-free appearance
- High efficacy of 90lm/W
- CRI>90
- Durable, flexible and low profile
- Double sided 3M tape mounting



## Electrical Data

Voltage	12V DC
Wattage per meter	<b>7.2W</b>
Current per meter	0.6A/12V

## LED Data

LED type	<b>COB</b>
Manufacturer	SAN'AN
Chips per meter	640

## Photometric Data

Color temperature	Adjustable 2700K - 6500K
Color rendering index Ra	>90
Luminous flux per meter	648 lm >4,000K 616 lm <3,000K
Luminous efficacy	90 lm/W >4,000K
Beam angle	135°
Dimmable	0~100%

## Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +45 C°
Storage temperature	-20 ~ +70 C°

## Dimensions

Cutting increments	25 mm See figure 1.
Length	5,000 mm
Width	8 mm
Height	1.6 mm

## Lifetime


Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 C°



**Figure 1.**

Dimensions & Cutting increments

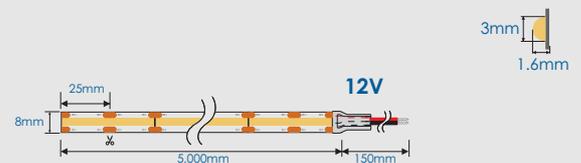

**Figure 2.**

Suitable Accessories

### Connector



### Profile



**Figure 3.**

IP Protection Ratings

