

High output series

SMD 2835 | 12mm (0.47in)

SMD

p/n: VFL-HO2835-930K-176-12-24V25



Features

- 176x SMD LED per meter (53xSMD LEDs per foot)
- Up to 3,207Lm/m (977Lm/ft)
- High efficacy of 128Lm/W
- CRI>90
- Durable, flexible and low profile
- Double sided 3M tape mounting



Electrical Data

Voltage	24V DC
Wattage	25W/m (7.62W/ft)
Current	1A/m (0.3A/ft)/24V

LED Data

LED type	SMD 2835
Manufacturer	Lumileds
Chips	176 Led/m (53 Led/ft)

Photometric Data

Color temperature	2700K / 3000K / 3500K 4000K / 6500K
Color rendering index Ra	>90
Luminous flux	3,207 Lm/m (977 Lm/ft) @ 3000K 3,046 Lm/m (928 Lm/ft) @ 2700K
Luminous efficacy	128 Lm/W @ 3000K
Beam angle	120°
Dimmable	0~100%

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +50 °C (-4 ~ 122 °F)
Storage temperature	-20 ~ +70 °C (-4 ~ 158 °F)

Dimensions

Cutting increments	45.5 mm (1.79 in) See figure 1.
Length	5 m (16.4 ft)
Width	12 mm (0.47 in)
Height	1.6 mm (0.06 in)

Lifetime

Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 °C (77°F)



Figure 1.

Dimensions & Cutting increments

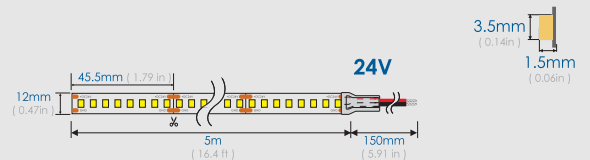


Figure 2.

Suitable Accessories

Connector-IP20/IP54



Profile



Figure 3.

IP Protection Ratings

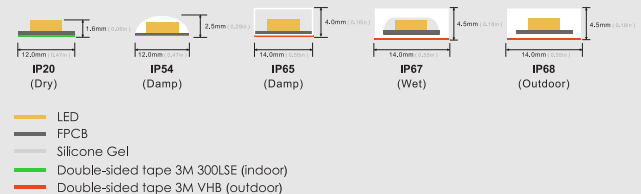


Figure 4.

Ordering Code

Series	LED type	CRI	CCT	LED Qty	PCB Width	IP Rating	Voltage	Power/m	
VFL	HO	2835	9	xxK	176	12	WPyY	24V	25
			9 - 90+	27K - 2700K			Blank - IP20		
			8 - 80+	30K - 3000K			54 - IP54		
				35K - 3500K			45 - IP65		
				40K - 4000K			67 - IP67		
				65K - 6500K			68 - IP68		