



VL-SI1010-3D (Small 3D series - dual bend)

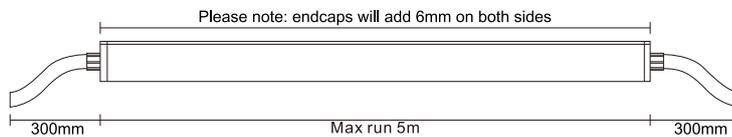

Free-bend - Flex Neon 24V
8W/m | 3000K CRI>90 | 400Lm/m

PROJECT		REFERENCE TYPE	
SPECIFIED BY		QUANTITY	
DATE		NOTE	



FEATURES

Fully automated extrusion silicone LED flexible neon, ideal for retail environments, art galleries, shelving displays and outdoor architectural detail displays, etc.
IP67 protection, specially in-feed system and end cap design enable a dot-free alignment of numerous fixtures.

Optics & Electronics

Unique integrated circuit design ensures uniform light intensity along the entire length of fixture.
Fully dimmable.

Customization

Front, bottom and side cable entry options available for different installation scenarios.
Endless fixture length configurations allow for the ultimate freedom of design.
Cut lengths and terminations are pre-assembled at Vals Lighting factory to ensure IP rating and reliability.

Life Cycle

Long lifetime of L70>54,001 hours with Five-year limited warranty for indoor applications and Three-year for outdoor applications.

VL-SI1010-3D (Small 3D series - dual bend)



SPECIFICATION LOGIC						
FAMILY	POWER W/m	NOMINAL LENGTH	Light Color	INPUT VOLTAGE	CABLE ENTRY	IP RATING
VL-SI1010-3D	8W/m	Minimum length - Free-cut Maximum length - 5m Increments length - Free-cut	27K -2700K 30K -3000K 40K -4000K 50K -5000K 65K -6500K	24VDC	FF - Front + Front SS - Side + Side BB - Bottom + Bottom FX - Front + Closed SX - Side + Closed BX - Bottom + Closed	IP67

Order example: VL-SI1010-3D-927K-5m-SS

PRODUCT SPECIFICATIONS				
		Standard		
Electrical	Power	8W/m		
	Input Voltage	24VDC		
Physical	Minimum Length	Free-cut		
	Width x Height	10mm x 10mm		
	Body Finish	Premium silicone / white		
	Bend Direction	Side and Top bending		
	Bend Radius	50mm		
	Qty of LED	240LEDs/m		
	IC Type	/		
	Cable Entry Options	Front, Side, Bottom		
Optical	Fixture Connections	IP67 injection-moulded input and end cap		
	LED Type	2216 LED		
	Control Protocol	0-10V or PWM or Dali		
	Lumen Output	400Lm/m(3000K)	421Lm/m(4000K)	447Lm/m(6500K)
	Efficacy	50Lm/W(CRI90, 3000K)		
Temperature Range	Lumen Maintenance	L70B10@54,000 hours		
	Storage Temperature	-25°Cmin, 60°Cmax		
	Max Ambient Temperature	50°C		
	Min Ambient Temperature	-25°C		

VL-SI1010-3D (Small 3D series - dual bend)



CABLE ENTRY OPTION EXAMPLES

F-FRONT	S-SIDE-LEFT	S-SIDE-RIGHT	B-BOTTOM	SEAMLESS SPLICING
FX 	SLX 	SRX 	BX 	
FF 	SLSL 	SRSR 	BB 	

PROFILES AND MOUNTING OPTIONS

FIXED ALUMINUM PROFILE

	EXAMPLES OF INSTALLATION	PART NUMBER	DETAILS
		1010-FAP-_____MM	FAP- Fixed aluminum profile

BENDABLE STAINLESS STEEL PROFILE

	EXAMPLES OF INSTALLATION	PART NUMBER	DETAILS
		1010-BSP-_____MM	BSP- Bendable stainless steel profile

MOUNTING CLIPS

	EXAMPLES OF INSTALLATION	PART NUMBER	DETAILS
		1010-MC	MC- Mounting clips

BENDING INSTRUCTION

Bending in wave form - vertical		TWIST < 180°
Bending in curve form - horizontal		

VL-SI1010-3D (Small 3D series - dual bend)

WIRING ELECTRICAL DIAGRAM

MONO

Input by one end

