

VFL-BD2835-940K-120-8-24V10


Bendable series
24V - 10W - 950Lm/m - 4000K



LED TYPE	
PROJECT	
NOTES	

Features

- 120x SMD LED per meter (36xSMD LEDs per foot)
- **Bendable** in both the horizontal and vertical planes
- Up to 950Lm/m (290Lm/ft)
- High efficacy of 95Lm/W
- CRI>90
- Ideal for signage, channel lettering and backlight applications
- Double sided 3M tape mounting

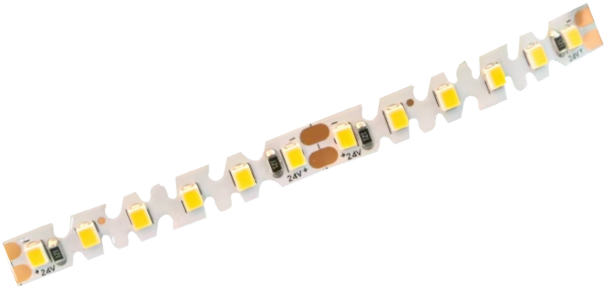

Electrical Data

Voltage	24V DC
Wattage	10W/m (3.04W/ft)
Current	0.4A/m (0.12A/ft)/24V

LED Data

LED type	SMD 2835
Manufacturer	Lumileds
Chips	120 Led/m (36 Led/ft)

Photometric Data

Color temperature	2700K / 3000K / 3500K 4000K / 6500K
Color rendering index Ra	>90
Luminous flux	902 Lm/m (275 Lm/ft) @ 3000K 950 Lm/m (290 Lm/ft) @ 4000K
Luminous efficacy	95 Lm/W @ 4000K
Beam angle	120°
Dimmable	0~100%

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +50 °C (-4 ~ 122 °F)
Storage temperature	-20 ~ +70 °C (-4 ~ 158 °F)

Dimensions

Cutting increments	50 mm (1.97 in) See figure 1.
Length	5 m (16.4 ft)
Width	8 mm (0.32 in)
Height	1.6 mm (0.06 in)

Lifetime

Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 °C (77°F)



Figure 1.

Dimensions & Cutting increments


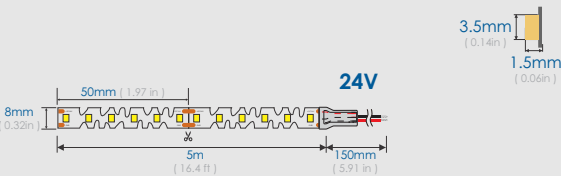


Figure 2.

Suitable Accessories

Connector-IP20/IP54

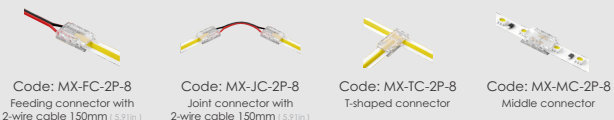

Profile



Figure 3.

IP Protection Ratings

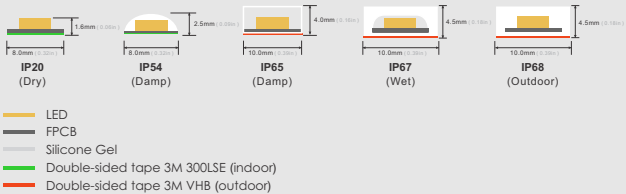


Figure 4.

Ordering Code

Series	LED type	CRI	CCT	LED Qty	PCB Width	IP Rating	Voltage	Power/m
VFL	BD	2835	9	xxK	120	yy	24V	10
		9 - 90+	27K - 2700K			Blank - IP20		
		8 - 80+	30K - 3000K			54 - IP54		
			35K - 3500K			45 - IP45		
			40K - 4000K			47 - IP47		
			65K - 6500K			68 - IP68		