

Basic series

SMD 2835 | 10mm (0.39in)

SMD

p/n: VFL-BS2835-950K-60-10-24V05

Features

- 60x SMD LED per meter (18xSMD LEDs per foot)
- Cost effective
- Up to 450Lm/m (293Lm/ft)
- High efficacy of 90Lm/W
- CRI>90
- Durable, flexible and low profile
- Double sided 3M tape mounting

Electrical Data

Voltage	24V DC
Wattage	5W/m (1.52W/ft)
Current	0.2A/m (0.06A/ft)/24V

LED Data

LED type	SMD 2835
Manufacturer	Lumileds
Chips	60 Led/m (18 Led/ft)

Photometric Data

Color temperature	2700K / 3000K / 3500K 4000K / 6500K
Color rendering index Ra	>90
Luminous flux	450 Lm/m (137 Lm/ft) @ 5000K 427 Lm/m (130 Lm/ft) @ 4000K
Luminous efficacy	90 Lm/W @ 5000K
Beam angle	120°
Dimmable	0~100%

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +50 °C (-4 ~ 122 °F)
Storage temperature	-20 ~ +70 °C (-4 ~ 158 °F)

Dimensions

Cutting increments	100 mm (3.94 in) See figure 1.
Length	5 m (16.4 ft)
Width	10 mm (0.39 in)
Height	1.6 mm (0.06 in)

Lifetime

Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 °C (77°F)



Figure 1.

Dimensions & Cutting increments

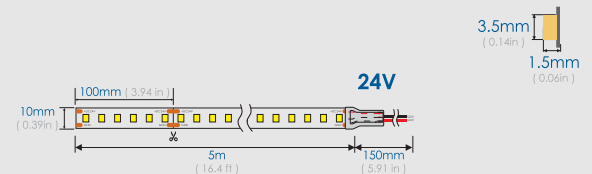


Figure 2.

Suitable Accessories

Connector-IP20/IP54



Profile



Figure 3.

IP Protection Ratings

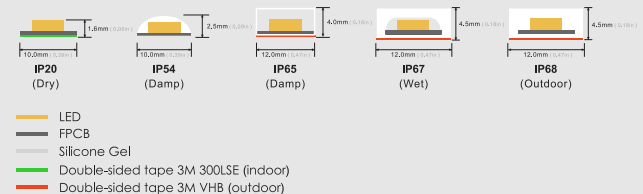


Figure 4.

Ordering Code

	Series	LED type	CRI	CCT	LED Qty	PCB Width	IP Rating	Voltage	Power/m
VFL	BS	2835	9	xxK	60	10	yy	24V	05
			9 ~ 90+	27K ~ 2700K			Blank ~ IP20		
			8 ~ 80+	30K ~ 3000K			54 ~ IP54		
				35K ~ 3500K			65 ~ IP65		
				40K ~ 4000K			67 ~ IP67		
				65K ~ 6500K			68 ~ IP68		