

Ultra Long series

COB | 7.2W/m | 10mm

p/n: VFL-LRCOB-940K-360-10-24V07

COB



Features

- Long run up to 15m
- 24V input
- **Hotspot-free appearance**
- High efficacy of 85lm/W
- CRI>90
- Durable, flexible and low profile
- Double sided 3M tape mounting

Electrical Data

Voltage	24V DC
Wattage per meter	7.2W
Current per meter	0.3A/24V

LED Data

LED type	COB
Manufacturer	SAN'AN
Chips per meter	360

Photometric Data

Color temperature	2700K / 3000K 4000K / 6500K
Color rendering index Ra	>90
Luminous flux per meter	612 lm >4,000K 582 lm <3,000K
Luminous efficacy	85 lm/W >4,000K
Beam angle	135°
Dimmable	0~100%

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M
IP rating	See figure 3.
Operating temperature	-20 ~ +45 C°
Storage temperature	-20 ~ +70 C°

Dimensions

Cutting increments	50 mm See figure 1.
Length	5,000 mm
Width	10 mm
Height	1.6 mm

Lifetime

Lifespan (L70)	>54,000 hours
----------------	---------------

Testing environment temperature = 25 C°



Figure 1.

Dimensions & Cutting increments


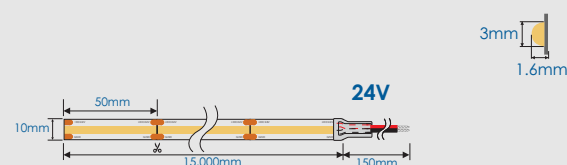


Figure 2.

Suitable Accessories

Connector

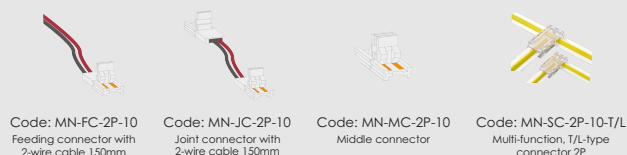

Profile



Figure 3.

IP Protection Ratings

