




LED TYPE	
PROJECT	
NOTES	

Features

- 288 x chips per sheet(87xSMD LEDs per foot)
- MONO modular
- Built-in terminal ports easy to connect to power
- Flexible, ideal for back lighting of acrylic, marble and glass
- Free-cut perfect to meet irregular shape application
- Durable, flexible and low profile
- Double sided 3M tape or screw mounting
- 50,000 hours rated life, and 5-year limited warranty

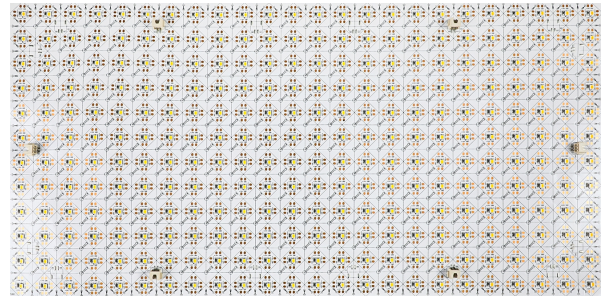

Electrical Data

Voltage	24.0V DC
Wattage per sheet	45W (13.7W/ft)
Current per sheet	1.87A(0.57A/ft)/24V

LED Data

LED type	2835
Manufacturer	Lumileds
Chips per sheet	288 (87 Led/ft)

Photometric Data

Color				
CRI	90+			
Luminous flux	2700K	3000K	4000K	6500K
	3,880 (1,182 Lm/ft) Lm/sheet	4,085 (1,245 Lm/ft) Lm/sheet	4,300 (1,310 Lm/ft) Lm/sheet	4,574 (1,394 Lm/ft) Lm/sheet
Luminous efficacy	95Lm/W@4000K			
Beam angle	120°			
Dimmable	1~100%			

Construction / Protection

Substrate	Double layer FPCB
Thickness of FPCB	2 oz
Mounting	Double sided tape 3M/screw
IP rating	See figure 4.
Operating temperature	-20 ~ +50 C°
Storage temperature	-20 ~ +70 C°

Dimensions

Cutting increments	20mm x 20mm (0.78*0.78in) See figure 1.
Length	480mm (18.9 in)
Width	240mm (9.45 in)
Height	1.6 mm (0.06 in)

Lifetime

Lifespan (L70)	>50,000 hours
----------------	---------------

Testing environment temperature = 25 C°



Figure 1.

Dimensions & Cutting increments

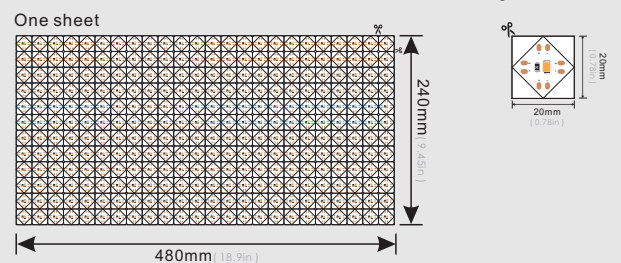


Figure 2.

Suitable Accessories


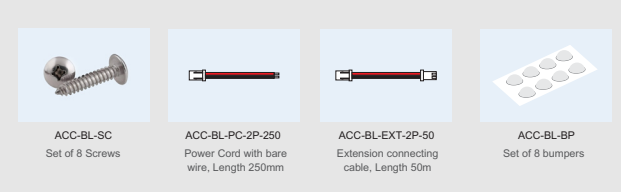


Figure 3.

Example of Installation



Wiring connection




Figure 4.

IP Protection Ratings

